
AXE5400 Tri-Band Wi-Fi 6E Range Extender

Boost your Wi-Fi

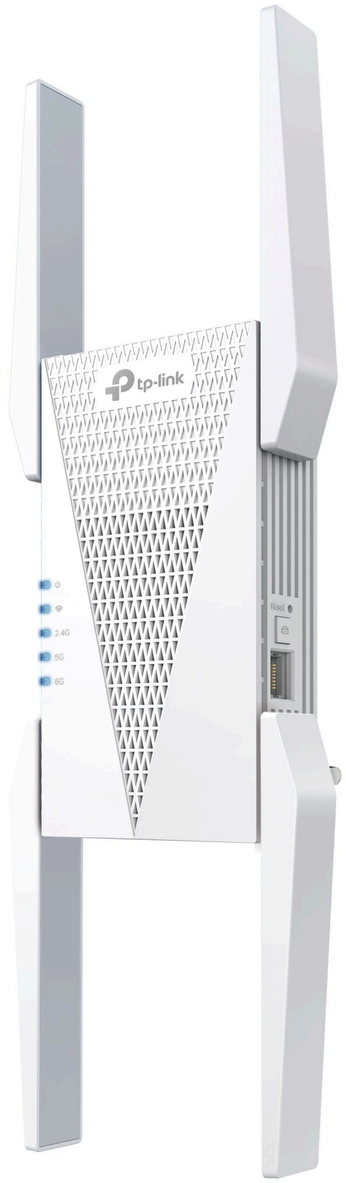


RE815XE

- Tri-Band Networking
- Wider Channel Width
- Connect More Devices△
- Uninterrupted Streaming§
- Easy Setup Within Minutes

Highlights

Eliminate Wi-Fi Dead Zones with Powerful Wi-Fi

Connect with a TP-Link's OneMesh™ router to create a mesh network for seamless whole-home coverage, or any Wi-Fi router to boost your Wi-Fi range.‡

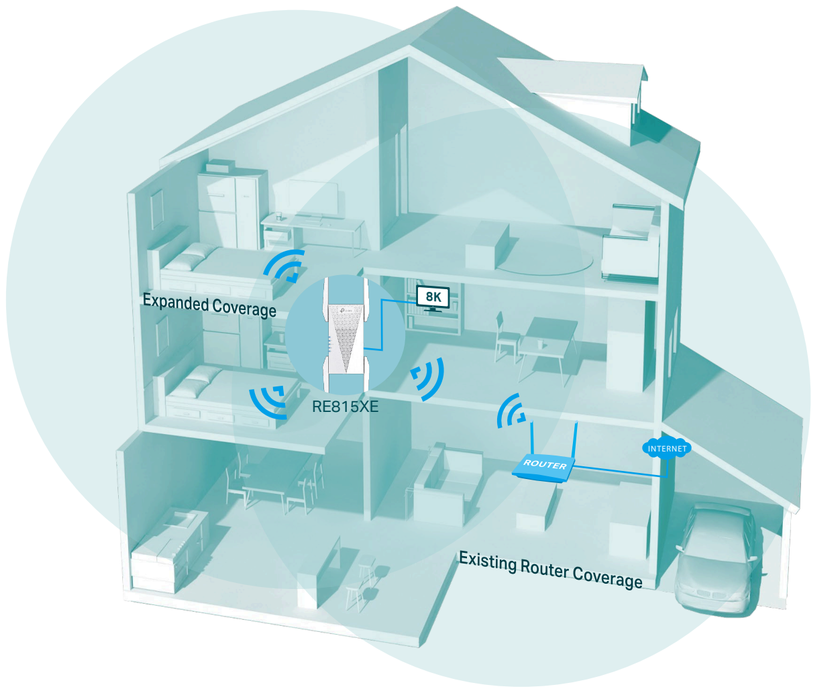

Tri-Band Networking

Ensure full band speeds to your devices thanks to RE815XE's another dedicated band backhaul.

Faster Wi-Fi 6 Speed

Experience explosive Wi-Fi speeds up to 5400 Mbps with the wider 160 MHz channel.†

Larger Capacity

Wi-Fi 6E allows for 3 additional 160 MHz channels, enabling more simultaneous transmissions at the highest possible speeds.

Clean and Congestion Free

The dedicated 6 GHz band provides a clearer band to prevent Wi-Fi interference and congestion.

Save Clients' Battery Power*

Target Wake Time schedules the connection time of battery-powered devices to reduce their power consumption.*

Adaptive Path Selection

Keep your network running at top-speed by automatically choosing the fastest connection path to the router.

Access Point Mode

Create a new Wi-Fi access point to enhance your wired network with Wi-Fi capability.

Highlights

Wi-Fi 6E: Huge Leap Forward for Wi-Fi

Robust High-Speed Connections

Experience ultra-fast Wi-Fi with more connected devices thanks to the brand-new 6 GHz band. The added 160MHz channels prevent competition over bandwidth and drops in speed.

Clean and Congestion-Free

Create an open and clear Wi-Fi network thanks to the brand-new 6 GHz band elimination interference from legacy devices. As a dedicated backhaul, the 6 GHz band also benefits the overall Wi-Fi performance of all non-6E devices.


More than a Traditional Wi-Fi Extender

Connect with a TP-Link's OneMesh™ router to create a mesh network for seamless whole-home coverage, or any Wi-Fi router to boost your Wi-Fi range.‡

Check the full list of OneMesh extenders and routers at:
tp-link.com/onemesh/compatibility

*More compatible devices coming soon

AXE5400 Wi-Fi 6E Tri-Band Range Extender

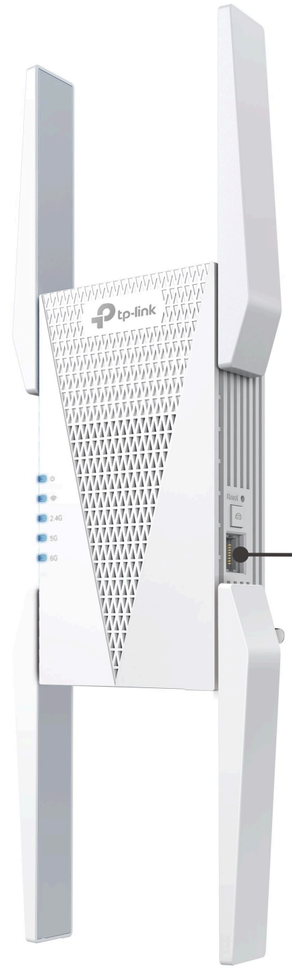



Secure One-touch Connection (WPS)

Press WPS button and connect the newly-added extender to a router with ease.

Smart Signal Indicator

See signal to find the best spot to properly place the extender.

- Strong signal
- Weak signal

Four External Antennas


Provide wider signal coverage.

Gigabit Ethernet Port

Plug in to give wired devices network access, ideal for high-bandwidth intensity.

PC | Game Console | Smart TV

Features

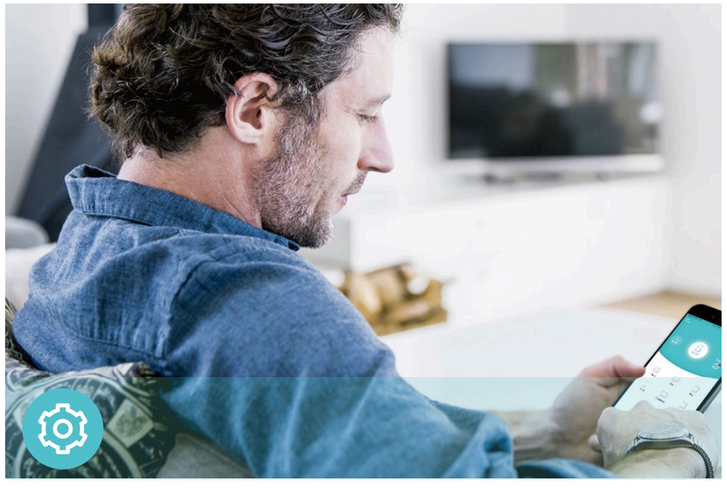


Ease of Use

- Intuitive Web UI– Ensures quick and simple installation without hassle
- Fast Setup – One-touch connection with the WPS button
- Hassle-free Management with Tether App – Network management is made easy with the TP-Link Tether App, available on any Android or iOS device
- Online Upgrade – Keeps you informed of the latest firmware and allows online updating on the web UI



Speed

- Ultimate Wireless Speed – Combined wireless speeds of up to 574 Mbps (over 2.4 GHz), 2402 Mbps (over 5 GHz) and 2402 Mbps (over 6 GHz)[†]
- Support Wi-Fi 6E – Turbocharge your devices with wireless speeds of up to 5.4 Gbps
- Adaptive Path Selection – Keep your network running at top-speed by automatically choosing the fastest connection path to the router

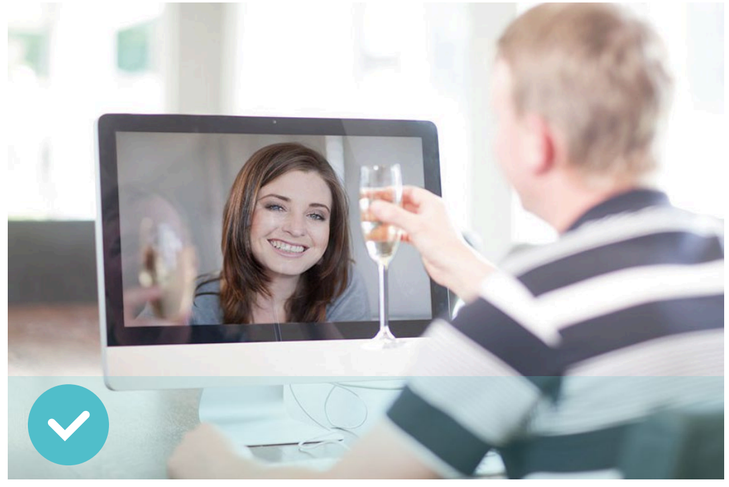


Reliability

- Simultaneous Tri Band – Separate Wi-Fi bands enable more devices to connect to your network without a drop in performance
- Reliable Connection – External antennas for optimal Wi-Fi coverage and reliable wireless connections
- Ultra-Low Latency – Take advantage of ultra-low latency to enjoy smoother online experience

Specifications

Hardware

- Button: WPS Button, Reset Button
- Port: 1 Gigabit Ethernet Port
- Antenna: 4 External Antennas
- Power Consumption: 16W
- Input Power：100-240V~50/60Hz
- Dimensions (L×W×H): 4.2×1.6×13.7 in. (106.6×39.7×348.2 mm)

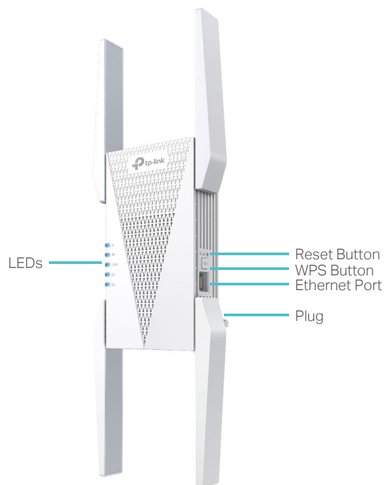

For more information, please visit
https://www.tp-link.com/home-networking/range-extender/RE815XE/
or scan the QR code left

Wireless

- Wireless Standards: IEEE 802.11ax 6 GHz, IEEE 802.11a/n/ac/ax 5 GHz, IEEE 802.11b/g/n/ax 2.4 GHz
- Frequency: 2.4 GHz / 5 GHz/ 6 GHz
- Signal Rate: 574 Mbps at 2.4 GHz, 2402 Mbps at 5 GHz, 2402 Mbps at 6 GHz
- Transmit Power: 2.4GHz ≤21dBm, 5GHz≤ 30dBm, 6GHz≤ 23dBm
- Reception Sensitivity:
  6GHz:
  11ax HE20 MCS0：-92dBm, 11ax HE20 MCS11：-61dBm
  11ax HE40 MCS0：-89dBm, 11ax HE40 MCS11：-58dBm
  11ax HE80 MCS0：-86dBm, 11ax HE80 MCS11：-55dBm
  11ax HE160 MCS0：-83dBm, 11ax HE160 MCS11：-52dBm
  5GHz:
  11ax HE20 MCS0：-93dBm, 11ax HE20 MCS11：-62dBm
  11ax HE40 MCS0：-90dBm, 11ax HE40 MCS11：-59dBm
  11ax HE80 MCS0：-87dBm, 11ax HE80 MCS11：-56dBm
  11ax HE160 MCS0：-84dBm, 11ax HE160 MCS11：-53dBm
  2.4GHz:
  11ax HE20 MCS0：-95dBm, 11ax HE20 MCS11：-64dBm
  11ax HE40 MCS0：-92dBm, 11ax HE40 MCS11：-62dBm
- Wireless Function: LED Control, Access Control, Power Schedule, Wi-Fi Coverage
- Wireless Security: 64/128-bit WEP, WPA/WPA-PSK2 encryptions, WPA3

Others

- Certification
  CE, RoHS
- System Requirements
  Microsoft Windows 98SE, NT, 2000, XP, Vista™ or Windows 7, 8, 8.1, 10, MAC OS, NetWare, UNIX or Linux
  Internet Explorer 11, Firefox 12.0, Chrome 20.0, Safari 4.0, or other Java-enabled browser
- Package Contents
  Wi-Fi Range Extender RE815XE
  Quick Installation Guide

†Maximum wireless signal rates are the physical rates derived from IEEE Standard 802.11 specifications. Actual wireless data throughput and wireless coverage per ft² are not guaranteed and will vary as a result of network conditions, client limitations, and environmental factors, including building materials, obstacles, volume and density of traffic, and client location.
‡The product may not be compatible with routers or gateways with firmware that has been altered, is based on open source programs, or is non-standard or outdated.
§Uninterrupted Streaming is designed for devices that support the 802.11k/v standard.
△Up to 4x Capacity refers to 4x increase in median throughput under dense environment compared to 11ac wave 2 range extender.
*Saving clients' battery power requires clients to also support the 802.11ax Wi-Fi standard. Actual power reduction may vary as a result of network conditions, client limitations, and environmental factors.
©2023 TP-Link